

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 999 071 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

10.05.2000 Bulletin 2000/19

(51) Int. Cl.⁷: B41M 5/30

(21) Application number: 99121881.9

(22) Date of filing: 04.11.1999

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 05.11.1998 JP 31485698

(71) Applicants:

- Riken
Wako-shi, Saitama 351-0198 (JP)
- CHROMIC Co., Ltd.
Tokyo 101-0041 (JP)

(72) Inventors:

- Date, Munehiro,
c/o Riken
Wako-shi, Saitama 351-0198 (JP)
- Kaimai, Mitsuru,
c/o Chromic Co., Ltd.
Tokyo 101-0041 (JP)
- Yokota, Yasuou,
c/o Mitsubishi Paper Mills Ltd.
Tokyo 100-0005 (JP)


(74) Representative:

Grünecker, Kinkeldey,
Stockmair & Schwanhäusser
Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)

(54) Reversible heat-sensitive paper and methods for writing information

(57) A reversible heat-sensitive layer 1a provided with an electron donative precursor and a reversible developer that colors and discolors the precursor, is provided on the surface of a base, and the reversible heat-sensitive recording layer is heated previously to a molten state and then quickly cooled to a solid colored state. Using this reversible heat-sensitive paper (reversible writing heat-sensitive paper), the reversible heat-sensitive recording layer is heated during operation to a color-erasing temperature range lower than the melting temperature of the layer, thereby, a heated part is discolored and written with information. Thus, the life of the reversible heat-sensitive layer can be prolonged and information can be written with weak light.

Fig. 1

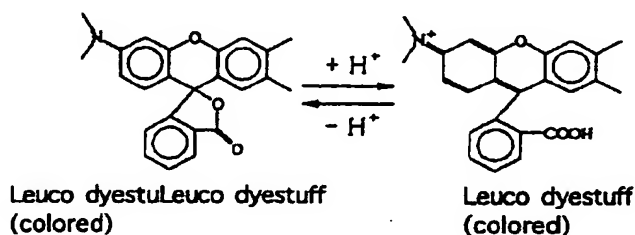

EP 0 999 071 A2

Description

BACKGROUND OF THE INVENTION

Technical Field of the Invention

[0001] The present invention relates to reversible heat-sensitive paper and methods for writing information on it.

Description of Prior Art

[0002] A sheet of conventional heat-sensitive recording paper is composed of a supporting base (for example, a paper sheet) provided with a heat-sensitive recording layer on the base, and when the sheet is heated by heating head, heating pen, laser light, etc., information on image, barcode, etc. is written on the heat sensitive recording layer. However, such heat-sensitive recording paper has a disadvantage in that once information is written, the information cannot be erased, so the paper cannot be used again.

[0003] To solve this problem, heat-sensitive recording materials with a reversible property were invented and patent applied (for instance, laid-open Japanese patent No. 179043/1995). The reversible heat-sensitive recording material according to the laid-open Japanese patent No. 179043/1995 normally contains a colorless or light-colored electron donative dyestuff precursor, and a special electron acceptive compound that reversibly changes the color of the dyestuff precursor when the compound is heated, and the material can create and erase an image with a high contrast and can maintain images stably over a wide range of erasing temperatures, as advantageous characteristics.

[0004] One of reversible heat-sensitive papers developed using such a reversible heat-sensitive recording material is, for example, leuco-based rewritable heat-sensitive paper using an electron donative dyestuff precursor. The electron donative dyestuff precursor is shown in Fig. 1; a lactone ring in the molecule opens in an acidic atmosphere and the precursor is colored, and by removing the acidic atmosphere, the lactone ring closes to resume a colorless state. The leuco-based rewritable heat-sensitive paper is combined with the electron donative dyestuff precursor and a reversible developer, where the reversible developer can reversibly create and erase a color through reactions with the electron donative dyestuff precursor. Typical reversible developers include, for example, a phenol-based compound with long chains in an alkyl group.

[0005] Fig. 2 shows a coloring and discoloring model. In Fig. 2, the electron donative dyestuff precursor and the reversible developer in a color-erased state (lower left) are heated, both are fused into a colored state (top), and when they are cooled quickly, the mix is solidified in a near-fusion state, thereby a solid colored

state (lower right) is maintained. When the mix is gradually cooled, conversely, the electron donative dyestuff precursor and the reversible developer return to an erased state. Therefore, they can reverse to color or discolor by quickly or gradually cooling the mix, respectively, after fusion. In addition, a solid mix in a colored state can be transited to the original discolored state by maintaining the mix for a predetermined time in a temperature range slightly lower than the melting point.

[0006] Fig. 3 is a typical sectional view of a reversible heat-sensitive paper 4 used conventionally for coloring and discoloring with light. In Fig. 3, the numerals represent a base medium by 1, a photo-thermal conversion layer by 2, and a protection film by 3. On the surface of the thermal sensitive paper 1, is formed a reversible heat-sensitive recording layer 1a consisting of an electron donative dyestuff precursor and a reversible developer, formed by a coating method. The opto-thermal conversion layer 2 contains a substance that converts light with a predetermined wavelength into heat, and the substance is normally applied to the surface of the heat-sensitive paper 1, but the substance may also be dispersed in the reversible heat sensitive recording layer. In the opto-thermal conversion layer 2, an organic coloring matter that absorbs selectively light with predetermined wavelengths is normally used. The protection film 3 is a transparent film that protects the surface of the heat-sensitive paper 1 and the opto-thermal conversion layer 2, and is normally composed of a transparent plastic coating.

[0007] The above-mentioned conventional reversible heat-sensitive paper 4 (leuco-based rewritable heat-sensitive paper) has the following problems.

(1) The life of an opto-thermal conversion substance used as an opto-thermal conversion layer 2 is so short that if the layer is placed at a bright location for several days (for instance, two or three days), the opto-thermal conversion substance is decomposed, resulting in a shorter life for the reversible heat-sensitive paper. In addition, intense light is required because the reversible heat-sensitive recording layer 2 (an electron donative dyestuff precursor and a reversible developer) must be heated and melted.

(2) When laser light is used to heat the opto-thermal conversion layer 2, a line smaller than the spot diameter of the laser light cannot be written. Consequently, the amount of information is limited when the layer is used to write barcodes, for example.

(3) A conventional writing process is based on so-called raster scanning by scanning lines, therefore, when information spreads two-dimensionally, in the case of letters or two-dimensional barcodes, a long writing time is required.

SUMMARY OF THE INVENTION

[0008] The present invention has been achieved to solve the aforementioned problems. The object of the present invention is to provide a reversible heat-sensitive paper (1) the life of which is long and can be written on with a feeble light source, (2) into which a line smaller than a light flux used (for example, a spot diameter of laser light) can be written, thereby, the amount of information in, for instance, barcodes etc. can be increased, and (3) into which two-dimensional information can be written within a short time, and methods for writing such information as described above.

[0009] To achieve the first object (1), the present invention offers a reversible heat-sensitive paper comprising a reversible heat-sensitive recording layer that colors and discolors its surface by controlling the changing speed of temperature and/or keeping temperature, and the reversible heat-sensitive recording layer being kept to a solid colored state. The reversible heat-sensitive recording layer comprises an electron donative dyestuff precursor and a reversible developer that colors and discolors the electron donative precursor, and the reversible heat-sensitive recording layer being heated to a fused state, in advance, and then quickly cooled to a solid colored state. In addition, the present invention discloses methods for writing information on reversible heat-sensitive paper, where the reversible heat-sensitive recording layer is heated to a color-erasing temperature lower than the melting temperature, thereby, the layer is discolored before use, and then information is written on the layer.

[0010] These reversible heat-sensitive paper and methods for writing information are characterized in that all of the surface of the paper is previously conditioned into a solid coloring state, and is partially discolored to write information. In the remainder of the text, these methods are called "reversible writing methods" and the reversible heat-sensitive paper for reversible writing is called "reversible writing heat-sensitive paper."

[0011] In the reversible writing methods, the entire surface of reversible heat-sensitive paper (reversible writing heat-sensitive paper) is in a coloring state, by which newly written parts are discolored. Therefore, the methods are especially suitable for creating a negative image, however, the methods can also apply to producing a positive image. Through these means, the coloring matter of reversible writing heat-sensitive paper is in the state of a solid color and can highly absorb light. Once it absorbs light, its temperature easily increases. Therefore, a conventional opto-thermal conversion layer with a short life can be omitted, so the life of the entire reversible heat-sensitive paper can be prolonged. In addition, the paper can be written on with a weak light source (for instance, using small-output laser equipment), because the paper needs to be heated only within the range of color-erasing temperature, which is lower than the melting temperature.

[0012] In addition, to achieve the second object (2), the present invention provides methods of writing information on reversible heat-sensitive paper, in which the reversible heat-sensitive paper with a reversible heat-sensitive recording layer made from an electron donative dyestuff precursor and a reversible developer that can color and discolor the aforementioned electron donative dyestuff precursor, formed on a base material, is irradiated with light to heat parts of the layer until the reversible heat-sensitive recording layer is molten, and then the layer is cooled quickly and the colored parts are irradiated with light partially in superposition, and the doubled parts are maintained at a predetermined discoloring range of temperatures, that is lower than the melting temperature for a predetermined time, thus making the parts discolored.

[0013] According to these methods, light (for instance, laser light) is irradiated to quickly cool and color parts, locally in superposition, and doubled parts are maintained within a color-erasing range of temperatures, that are lower than the melting temperature, thereby the color of such parts is erased, therefore, the doubled parts can be turned into a color-erased state, and non-doubled parts can be made into an ordinary state of coloring. Consequently, the width of a line in single parts can be made smaller than a light flux used (for example, the spot diameter of laser light), so the amount of information such as that in barcodes can be sharply increased.

[0014] Furthermore, to achieve the third object (3), the present invention presents methods for writing information on reversible heat-sensitive paper, in which a light exposing mask is positioned between a light source and the reversible heat-sensitive paper, and by focusing light transmitted through the mask on the reversible heat-sensitive paper to write two-dimensional information.

[0015] According to these methods, two-dimensional information can be written instantly simultaneously, so the time for writing two-dimensional information can be greatly reduced.

[0016] The reversible heat-sensitive recording material used in the present invention contains an electron donative dyestuff precursor and a reversible developer that colors the aforementioned electron donative dyestuff precursor, as the main constituents. A compound that is publicly known to be generally applicable to pressure-sensitive recording paper, heat-sensitive recording paper, etc. can be used as an electron donative dyestuff precursor, without any particular restrictions. In addition, the preferred reversible developer is an electron donative compound such as organic phosphonate compound, α -hydroxy aliphatic carboxylate, aliphatic dicarboxylate, and alkylthiophenol, alkyloxyphenol, alkylcarbamoylephenol, or alkylgallate, with a carbon number of 12 or more. However, there are no particular restrictions provided the developer can reversibly change color tone. In addition, the com-

pounds described in the laid-open Japanese patent No. 210954/1994, unexamined Japanese patent applications Nos. 160547/1993; 256825/1993; 317555/1993; 328101/1993; and 10310/1994 are especially preferred.

[0017] The other objects and advantages of the present invention are clarified through the following description referring to the attached drawings.

BRIEF DESCRIPTION OF DRAWINGS

[0018]

Fig. 1 is a view for describing coloring and discoloring of a reversible heat-sensitive recording material.

Fig. 2 shows a model of coloring and discoloring of a reversible heat-sensitive recording material.

Fig. 3 is a sketch of a sectional view of a conventional reversible heat-sensitive paper.

Fig. 4 is a view describing the characteristics of the reversible heat-sensitive paper used in the present invention.

Fig. 5A shows the reversible heat-sensitive paper according to the first embodiment of the present invention (reversible writing heat-sensitive paper), and Fig. 5B illustrates methods for writing information according to the first embodiment of the invention (reversible writing methods).

Fig. 6A is a sketch of test results in the second embodiment of the present invention, and Fig. 6B shows information writing methods according to the second embodiment of the invention (erasing methods).

Fig. 7A shows methods for writing information according to the third embodiment of the present invention, and Fig. 7B is a sketch of a mechanical mask used in these methods.

DESCRIPTION OF PREFERRED EMBODIMENTS

[0019] Preferred embodiments of the present invention are described below referring to the drawings. The same code numbers are used in all drawings for the same parts, and no duplicate description is given.

[0020] Fig. 4 describes characteristics of the reversible heat-sensitive paper used in the present invention. In Fig. 4, the abscissa and the ordinate are axes for temperatures and coloring densities, respectively. As shown by the arrows in this view, when the reversible heat-sensitive recording layer (for instance, composed of an electron donative dyestuff precursor and a reversible developer) in the color erased state (A) is heated, the precursor and the developer are fused together into the colored state (B), and when the mix is quickly cooled, the mix is solidified in a state close to fusion, thus the mix is maintained in a solid colored state (C). Conversely, if the mix is gradually cooled from the fused state (B), the precursor and the developer are separated in phase and return to the original color-

erased state (A).

[0021] When the mix is maintained in the solid colored state (C) at a temperature in a range slightly lower than the melting temperature, the mix transits to the original color-erased state (A). This range of temperature (slightly lower than the melting temperature) is called the "color-erasing temperature range."

[0022] Figs. 5A and 5B show the reversible heat-sensitive paper (reversible writing heat-sensitive paper) and information writing methods (reversible writing methods), respectively, according to the first embodiment of the present invention.

[0023] In Fig. 5A, the reversible heat-sensitive paper according to the present invention (reversible writing heat sensitive paper) is provided with, for instance, an electron donative dyestuff precursor and a reversible color developer, and acts as a reversible heat-sensitive paper 5 provided with a reversible heat-sensitive recording layer 1a whose color changes depending on whether the layer is quickly or gradually cooled after it is heated. This reversible heat-sensitive paper 5 does not incorporate a conventional opto-thermal conversion layer (see Fig. 3), and instead, the reversible heat-sensitive recording layer 1a is previously heated to a fused state and then is quickly cooled to a solid colored state. This reversible heat-sensitive paper 5 does not need an opto-thermal conversion layer 2. This is because the coloring matter of the reversible heat-sensitive recording layer 1a in a solid colored state is so dense that it absorbs and generates heat. A protection film 3 shown in Fig. 3 is to be installed preferably to protect the reversible heat-sensitive recording layer 1a, but the film is not indispensable.

[0024] According to the information writing methods of the present invention (reversible writing methods) shown in Fig. 5B, the reversible heat-sensitive paper 5 without an opto-thermal conversion layer (reversible writing heat-sensitive paper) is used, and during operation, the reversible heat-sensitive recording layer 1a is heated to a color-erasing temperature range lower than the melting temperature, and necessary parts are set to a color-erased state, and information is written on such parts. As the heat source used for writing, a light source that emits light with a wavelength, that can be absorbed easily by the reversible heat-sensitive recording layer 1a in a solid colored state (called an absorptive wavelength), such as laser light source generating laser light with an absorptive wavelength is preferred. At that time, the intensity of the laser light should be adjusted appropriately according to characteristics of the reversible heat-sensitive paper to be used.

[0025] More explicitly, the above-mentioned means can write information by setting the entire surface in a solid colored state (C in Fig. 4), beforehand, and by discoloring parts of the surface during operation. Newly written parts are discolored, therefore, the means are suitable directly for producing a negative image. However, by irradiating the means so as to leave necessary

parts, a positive image can also be created, as in a conventional system. In the means, as described above, the coloring matter in a solid colored state absorbs light and generates heat, therefore, a conventional opto-thermal conversion layer with a short life can be omitted, so the life of the entire reversible heat-sensitive paper can be prolonged. Moreover, when writing, the means needs to be heated only to a color-erasing temperature range lower than the melting temperature, so the means can be written with a weak light source (for instance, using laser equipment with a small output).

[0026] Figs. 6A and 6B show a sketch of test results and information-writing methods (writing-erasing methods) of the second embodiment of the present invention, respectively.

[0027] Fig. 6A is a conceptual view showing test results when the reversible heat-sensitive paper 4 in Fig. 3 is irradiated with a fine laser light to color the paper. In Fig. 6A, (a) and (b) relate to irradiations at intervals to isolate traces of laser light and with partial superimpositions, respectively.

[0028] In (a) in Fig. 6A, thick lines 6 with a width substantially same as the spot diameter of laser light (about 50 μ m) are colored. In (b) doubled parts 6a return to the color-erased state as a result, it is revealed that the width of written lines 6 is smaller than the spot diameter of laser light. In other words, in the case of (b), single parts 6b are heated in the same way as with the thick lines 6 in (a), allowed to stand naturally after heating, and then are quickly cooled by the atmosphere to shift to a colored state. Conversely, colored portions of doubled parts 6a quickly cooled are reheated, therefore, the temperature of the portions was maintained in the above-mentioned color-erasing temperature range for a predetermined time. As a consequence, it might be subjected to gradual cooling as shown in Fig. 4, and the portions might return to an erased state.

[0029] The methods of the present invention shown in Fig. 6B are achieved based on novel knowledge obtained from the test results in Fig. 6A. The methods are called "writing erasing methods" in the following paragraphs.

[0030] According to the invented methods (writing erasing methods), light is irradiated to heat parts in which the reversible heat sensitive recording layer 2 is heated to a fused state, then quickly cooled to color the parts on which light is irradiated in superimposition, and portions illuminated in superimposition are maintained at a color-erasing temperature range lower than the melting temperature for a predetermined time to discolor the portions.

[0031] As a light source for emitting light with an absorptive wavelength, laser light 7 may be used preferably, but the present invention is not restricted only to this means and may use another light source. When a laser light source is used as shown in the example in Fig. 6A, beams of laser light are shifted slightly toward each other in the horizontal direction of the view, to

clearly show the situation, and such shifting is not needed in practice, as a matter of course. In addition, in Fig. 6B, laser light 7 is focused onto the opto-thermal conversion layer 2 using an optical system 7a (convex lens etc.), however, fine beams of laser light 7 can be irradiated directly.

[0032] According to the aforementioned methods of the present invention (writing erasing methods), light (for instance, laser light) is irradiated to parts that have been colored by quick cooling, partially in superimposition, and doubled portions 6a are maintained in a color-erasing temperature range, that is lower than the melting temperature, for a predetermined time to discolor such portions, so the doubled portions 6a can be discolored, and single portions 6a can be colored in a normal state. Therefore, the width of a line in the single portions 6a can be made smaller than the light flux used (for example, spot diameter of laser light), thereby, the amount of information on a barcode can be increased dramatically.

[0033] Figs. 7A and 7B show the information-writing methods and a sketch of the mechanical mask used in the methods, according to the third embodiment of the present invention.

[0034] As typically shown in Fig. 7A, according to the methods of the present invention, an exposing mask 9 with an information content is positioned between a light source 8 and reversible heat sensitive paper 5, and light transmitted through the exposing mask 9 is focused on the reversible heat-sensitive paper to write two-dimensional information. These methods are called "all surface simultaneous writing methods."

[0035] As a light source 8 used in the all surface simultaneous writing methods (two-dimensional writing), a pulse light source such as a flash lamp may preferably be used.

[0036] To color the entire surface as a pre-stage of reversible lighting, one-dimensional scanning using a heater or an incandescent lamp is carried out for heating in a straight line (for instance, a vertically spread light source is moved from left to right), or a flash light source is used to instantly heat the entire surface for coloring. If cooling rate is insufficient, an air-cooling mechanism may preferably be added.

[0037] To erase the entire surface, a heater, incandescent lamp or flash light source is used to heat the entire surface instantaneously, thereby, the entire surface is discolored. Or, hot air etc. may also be blown.

[0038] Mechanisms for coloring and discoloring the entire surface are substantially the same, and are controlled by heating temperature (a low temperature gives rise to discoloring) or cooling rate (a long heating time may heat the layer more deeply down to the supporting base, resulting substantially in gradual cooling).

[0039] As the exposing mask 9, some optical gates, such as a mechanical mask, optical mask, liquid crystal, movable mirror, etc. can be used. Fig. 7B shows an example of the mechanical mask; a plurality of shutter

belts 9a are provided in orthogonal x and y directions, and each belt is independently opened and closed using an actuator, not illustrated, thus, a free transmission pattern can be formed. When a liquid crystal is used as the exposing mask 9, transmission of light is controlled two-dimensionally.

[0040] By irradiating this exposing mask 9 with an intense light source 8 and focusing the image of the exposing mask 9 on recording paper using an appropriate optical system 8a, the preferred portions can be heated. According to these methods (simultaneous writing methods for the entire surface), two-dimensional information can be written simultaneously, so that time for writing two-dimensional information can be greatly reduced.

[0041] In addition, in the case of one-dimensional writing, raster scanning in which laser light is scanned on recording paper can be applied, as well as vector scanning for controlling laser light two-dimensionally to write information onto recording paper.

[0042] As described above, the reversible heat-sensitive paper and methods for writing information on the paper according to the present invention provide the following effects.

(1) Using "reversible writing heat-sensitive paper" and "reversible writing methods," the entire surface is conditioned to a solid colored state, beforehand, and the surface is partially discolored during operation to write information. Therefore, a conventionally used opto-thermal conversion layer with a short life can be omitted, taking advantage of the opto-thermal conversion characteristics of the solid colored state, and the life of the entire reversible heat-sensitive paper can be prolonged. In addition, because the paper is required to be heated almost to a color-erasing temperature range, which is lower than the melting temperature, writing can be achieved using a weak light source (for instance, laser equipment with a small output).

(2) According to the "writing erasing methods," the width of a line of single parts can be made smaller than a light flux used (for example, spot diameter of laser light), therefore, the amount of information on a barcode etc. can be sharply increased.

(3) The "all surface simultaneous writing methods" enable simultaneous writing of two-dimensional information within a short period, resulting in a great reduction in the time for writing two-dimensional information.

[0043] In summary, the reversible heat-sensitive paper and the methods for writing information on the paper according to the present invention provide (1) longer life for the reversible heat-sensitive paper and writing with a weak light source, (2) lighting using a finer line than a light flux used (for instance, spot diameter of laser light), and a greater amount of information on a

barcode etc., and (3) simultaneous, short-time writing of two-dimensional information, as desirable effects.

[0044] Although the present invention has been described referring to a number of preferred embodiments, it should be understood that the scope of rights contained in the invention is not limited only to these embodiments. Conversely, the scope of rights of the invention includes all improvements, modifications, and similar entities covered by the scope of the attached claims.

Claims

1. A reversible heat-sensitive paper comprising a reversible heat-sensitive recording layer that colors and discolors its surface by controlling the changing speed of temperature and/or keeping temperature, and the reversible heat-sensitive recording layer being kept to a solid colored state.

2. The reversible heat-sensitive recording layer comprises an electron donative dyestuff precursor and a reversible developer that colors and discolors the electron donative precursor, and the reversible heat-sensitive recording layer being heated to a fused state, in advance, and then quickly cooled to a solid colored state.

3. Methods of writing information on a reversible heat-sensitive paper, in which a reversible heat-sensitive paper comprising a

reversible heat-sensitive layer that comprises an electron donative dyestuff precursor and a reversible developer that colors and discolors the electron donative precursor is prepared by heating, in advance, to a molten state and then quickly cooled to a solid colored state, and a part of the reversible heat-sensitive recording layer is heated to a color-erasing temperature range that is lower than the melting temperature of the reversible heat sensitive recording layer, during operation, and the part is discolored and stores the information.

4. Methods of writing information on a reversible heat-sensitive paper, in which

the reversible heat-sensitive paper comprising a reversible heat-sensitive recording layer that comprises an electron donative precursor and a reversible developer that colors and discolors the electron donative precursor, formed on a supporting base, is irradiated with light and an irradiated part is heated to heat the reversible heat-sensitive recording layer to a molten state, then the part is quickly cooled, and a colored portion is irradiated with light partially in super-

imposition, and the doubled irradiated portion is discolored by maintaining the portion in a color-erasing temperature range that is lower than the melting temperature of the reversible heat-sensitive recording layer, for a predetermined time, thereby, the portion is discolored.

5

5. Methods of writing information onto a reversible heat sensitive paper, on which an exposing mask is positioned between a light source and the reversible heat sensitive paper, light is transmitted through the mask and is focused on the reversible heat-sensitive paper, and two-dimensional information is written.

10

15

20

25

30

35

40

45

50

55

7

Fig. 1

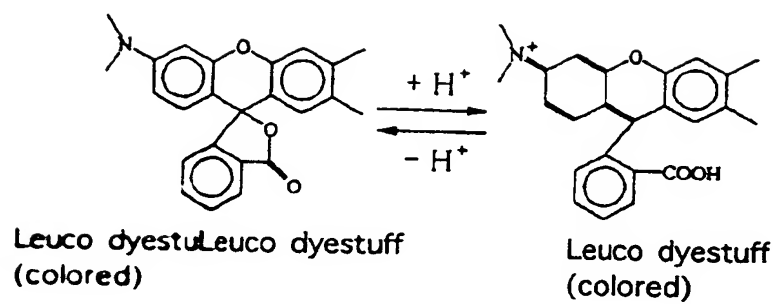


Fig. 2

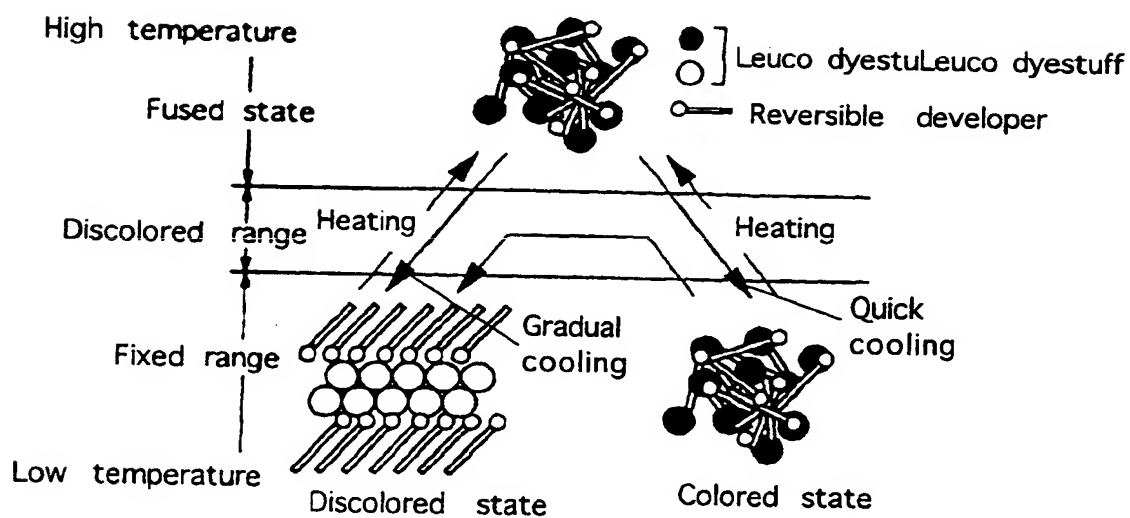


Fig. 3

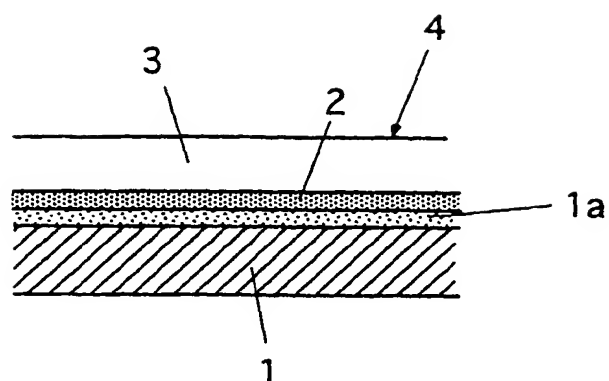


Fig.4

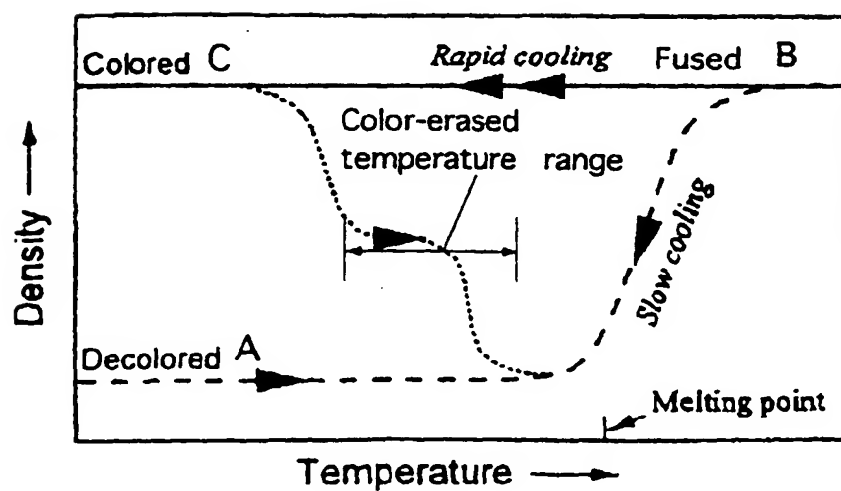


Fig. 5A

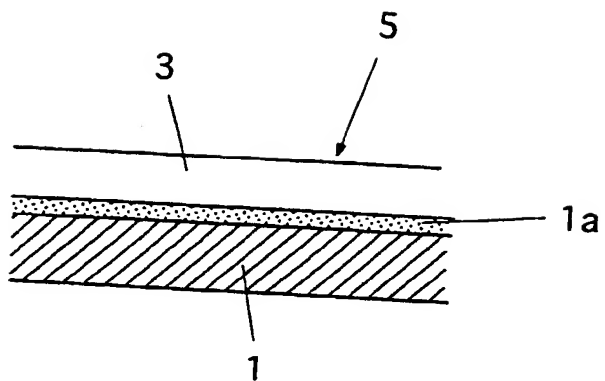


Fig. 5B

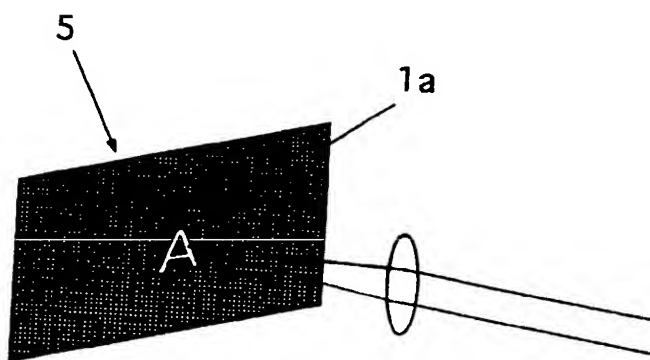


Fig. 6A

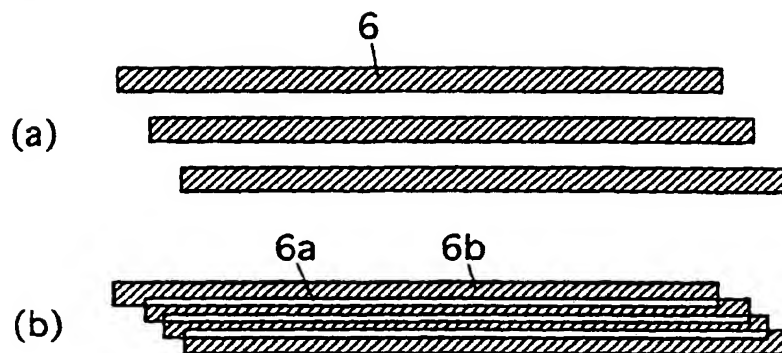


Fig. 6B

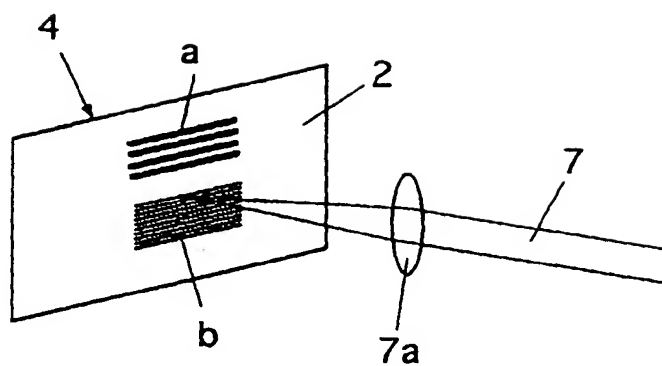


Fig. 7A


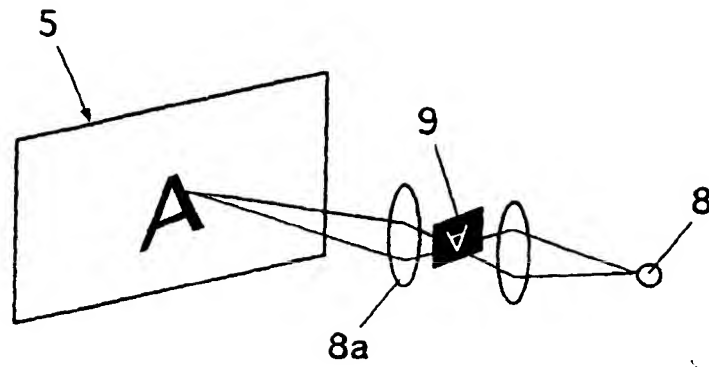


Fig. 7B



(19)

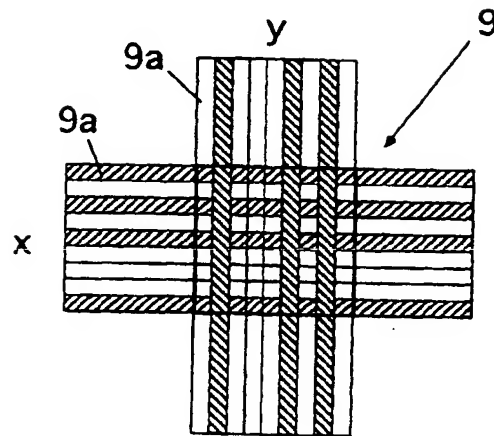

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 999 071 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
19.09.2001 Bulletin 2001/38

(51) Int Cl.7: **B41M 5/30**

(43) Date of publication A2:
10.05.2000 Bulletin 2000/19

(21) Application number: **99121881.9**(22) Date of filing: **04.11.1999**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **05.11.1998 JP 31485698**

(71) Applicants:
• **Riken**
Wako-shi, Saitama 351-0198 (JP)
• **CHROMIC Co., Ltd.**
Tokyo 101-0041 (JP)


(72) Inventors:
• **Date, Munehiro, c/o Riken**
Wako-shi, Saitama 351-0198 (JP)
• **Kaimai, Mitsuru, c/o Chromic Co., Ltd.**
Tokyo 101-0041 (JP)
• **Yokota, Yasurou, c/o Mitsubishi Paper Mills Ltd.**
Tokyo 100-0005 (JP)

(74) Representative: **Grünecker, Kinkeldey,**
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)

(54) Reversible heat-sensitive paper and methods for writing information

(57) A reversible heat-sensitive layer 1a provided with an electron donative precursor and a reversible developer that colors and discolors the precursor, is provided on the surface of a base, and the reversible heat-sensitive recording layer is heated previously to a molten state and then quickly cooled to a solid colored state. Using this reversible heat-sensitive paper (reversible

writing heat-sensitive paper), the reversible heat-sensitive recording layer is heated during operation to a color-erasing temperature range lower than the melting temperature of the layer, thereby, a heated part is discolored and written with information. Thus, the life of the reversible heat-sensitive layer can be prolonged and information can be written with weak light.

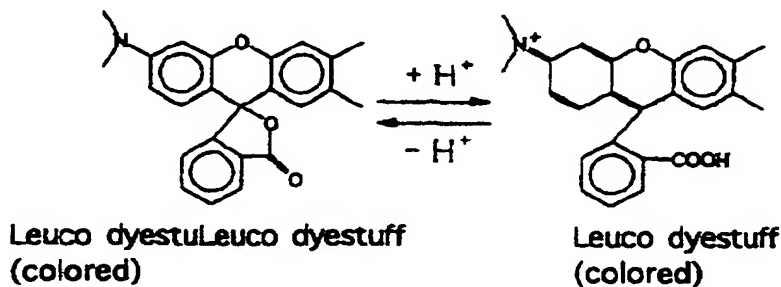Fig. 1

EP 0 999 071 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 12 1881

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 663 115 A (MIYAMOTO HIROHISA ET AL) 2 September 1997 (1997-09-02)	1-4	B41M5/30
Y	* column 5, line 40 - column 6, line 17 * * column 9, line 47 - column 10, line 25 * * column 21, line 28 - line 56 * * column 22, line 57 - column 23, line 5; example 1 * * examples 2,4 *	5	
X	GB 2 135 466 A (PILOT INK CO LTD) 30 August 1984 (1984-08-30)	1-4	
Y	* page 1, line 20 - line 62 * * page 2, line 1 - page 3, line 60 * * page 8, line 25 - line 26 * * examples 1,2 * * figure 1 *	5	B41M
X	US 5 703 005 A (FURUYA HIROMI ET AL) 30 December 1997 (1997-12-30)	1-4	
Y	* column 2, line 34 - column 4, line 16 * * column 23, line 23 - column 24, line 29 * * example 1 * * figure 1 *	5	
X	GB 2 320 582 A (RICOH KK) 24 June 1998 (1998-06-24)	1-4	B41M
Y	compound (1) * page 7, line 14 - page 9, line 12 * * page 22, line 10 - page 23, line 10 * * page 73, line 13 - line 20 * * page 77, line 26 - page 79, line 17 *	5	
X	DE 196 27 185 A (TOSHIBA KAWASAKI KK) 9 January 1997 (1997-01-09)	1,2	
	* page 3, line 39 - page 4, line 4 * * page 8, line 1 - line 7 * * examples 26,36 *		
-/--			
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 25 July 2001	Examiner Whelan, N
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/92 (P.4/001)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 12 1881

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 547 500 A (TSUTSUI KYOHJI) 20 August 1996 (1996-08-20) * column 4, line 33 - column 5, line 5 * compound (2) * column 10, line 46 - column 11, line 17 * * examples 1,2 *	1,2	
X	US 5 521 138 A (KUBO KEISHI ET AL) 28 May 1996 (1996-05-28) * the whole document *	1,2	
X	US 5 407 890 A (ISHIKAWA SHUNICHI) 18 April 1995 (1995-04-18) * the whole document *	1,2	
Y	EP 0 600 441 A (DAINIPPON INK & CHEMICALS ;KIRIN BREWERY (JP)) 8 June 1994 (1994-06-08) * page 3, line 33 - page 3, line 39 * * page 6, line 48 - page 7, line 19 * * page 12, line 43 - line 45 *	5	
P,X	GB 2 326 726 A-(RICOH KK) 30 December 1998 (1998-12-30) * the whole document *	1,2	<p>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</p>
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 25 July 2001	Examiner Whelan, N
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>I : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1533/92 (P4/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 12 1881

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-07-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5663115 A	02-09-1997	CN 1118887 A	20-03-1996
		DE 19507151 A	07-09-1995
		JP 8197853 A	06-08-1996
GB 2135466 A	30-08-1984	JP 1743932 C	15-03-1993
		JP 3036031 B	30-05-1991
		JP 59120492 A	12-07-1984
		DE 3347171 A	28-06-1984
		FR 2538309 A	29-06-1984
US 5703005 A	30-12-1997	JP 9327971 A	22-12-1997
GB 2320582 A	24-06-1998	JP 10230680 A	02-09-1998
		DE 19756888 A	02-07-1998
		FR 2757446 A	26-06-1998
		US 5981115 A	09-11-1999
DE 19627185 A	09-01-1997	CN 1141243 A	29-01-1997
		JP 9071055 A	18-03-1997
		US 5869420 A	09-02-1999
US 5547500 A	20-08-1996	JP 7309070 A	28-11-1995
US 5521138 A	28-05-1996	DE 4221322 A	14-01-1993
		FR 2678212 A	31-12-1992
		JP 5294063 A	09-11-1993
US 5407890 A	18-04-1995	JP 6328864 A	29-11-1994
EP 0600441 A	08-06-1994	JP 2751089 B	18-05-1998
		JP 6166266 A	14-06-1994
		DE 69304296 D	02-10-1996
		DE 69304296 T	13-02-1997
		DE 69311881 D	07-08-1997
		DE 69311881 T	16-10-1997
		EP 0601444 A	15-06-1994
		US 5528280 A	18-06-1996
		US 5413629 A	09-05-1995
GB 2326726 A	30-12-1998	JP 11070731 A	16-03-1999
		US 6090748 A	18-07-2000

EPC FORM 20466

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

EUROPEAN PATENT OFFICE

Patent Abstracts of Japan

PUBLICATION NUMBER : 2001001645
PUBLICATION DATE : 09-01-01


APPLICATION DATE : 24-06-99
APPLICATION NUMBER : 11178743

APPLICANT : GUNZE LTD;

INVENTOR : TANAKA AKIHIRO;

INT.CL. : B41M 5/26 B41M 5/34

TITLE : THERMALLY REVERSIBLE MULTIPLE
COLOR RECORDING MEDIUM

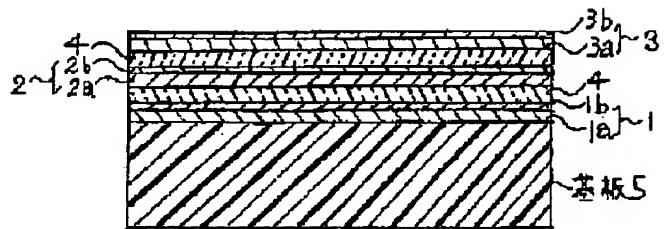

ABSTRACT : PROBLEM TO BE SOLVED: To provide a new reversible multiple color recording medium by which a more accurate, finer and clearer multiple color image can be expressed, and wherein a re-writing can be freely performed by deleting the image.

SOLUTION: A writing is performed by using at least three laser beams, and this thermally reversible multiple color recording medium is constituted by laminating at least following three layers of respective thermally reversible color recording layers (A) to (C) on a base sheet 5. That is, the thermally reversible multiple color recording medium comprises (A) a thermally reversible color recording layer 1 comprising a first thermally reversible color developing layer 1a and a first laser beam absorbing layer 1b having a wavelength to develop a color of the color developing layer, (B) a thermally reversible color recording layer 2 comprising a second thermally reversible color developing layer 2a and a second laser beam absorbing layer 2b having a wavelength to develop a color of the color developing layer, and (C) a thermally reversible color recording layer 3 comprising a third thermally reversible color developing layer 3a and a third laser beam absorbing layer 3b having a wavelength to develop a color of the color developing layer. More preferably, a transparent heat insulating layer (glass bead or the like) is inserted between the recording layers 1 and 2, and 2 and 3. A multiple color recording/deletion is performed with colors of red, blue, green and the like.

COPYRIGHT: (C)2001,JPO

THIS PAGE BLANK (USPTO)